


# 4-Axis PROPlus Automated Dispensing Systems

Easy 4-axis automation with a rotating table for longevity and application versatility



Removable rotating table allows for both 4-axis and 3-axis applications.

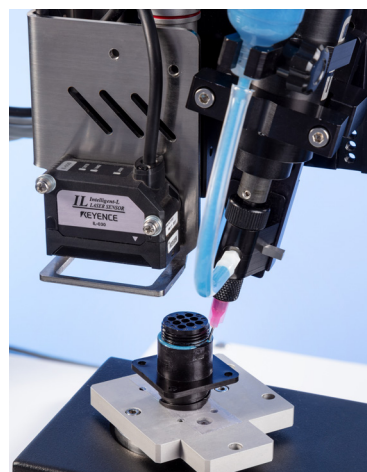

Achieve R-axis repeatability of 0.005°.



Fixed head creates less wear and tear with the rotating table.

Part #	Description
7364961	4-axis PROPlus robot
7366457	4-axis PROPlus robot - Europe
7028278	400 mm fixture plate*

\*Recommended for 3-axis applications. Order separately.



more info

Nordson EFD's 4-axis PROPlus automated dispensing systems are specifically designed and configured for precise fluid dispensing using EFD syringe barrel and valve systems.

The modular design allows for both 4-axis and 3-axis configurations to provide users with flexibility for a wide range of dispensing applications. When used as a 4-axis, the rotating table creates less vibration and therefore less wear and tear than standard 4-axis robots with a rotating head. The fixed head also gives users the ability to mount heavier dispensing devices for added versatility.

In addition, the 4-axis PROPlus robot features the same features as our PROPlus Series including specialized DispenseMotion™ software, integrated vision and laser height detection, and best-in-class X, Y, and Z-axis repeatability of  $\pm 0.003$  mm and R-axis repeatability of 0.005°.

## Features

- Modular design for 3- and 4-axis applications
- Dual linear guide, advanced servomotor, and ball screw actuation
- Simplified setup and programming
- On-screen preview and confirmation of the dispense path
- Constant closed-loop feedback

## Benefits

- Best-in-class X, Y, and Z-axis repeatability and speed at  $\pm 0.003$  mm and R-axis repeatability of 0.005°
- Improved quality and consistency
- Rotating table creates less vibration that reduces wear and tear and improves longevity of the robot
- Easy integration into existing manufacturing operations
- Faster speed for higher product output



# Specifications

**NOTE:** Specifications and technical details are subject to change without prior notification.

Item	Specification
Number of axes	4
Maximum working area (X / Y / Z / R*)	350 / 400 / 100 mm / ±1080° (14 / 16 / 4" / ±1080°)
Workpiece payload (Y axis without the rotating table)	22.0 kg (48.5 lb)
Workpiece payload (R*)	2.0 kg (4.4 lb)
Tool payload (Z)	6.0 kg (13.2 lb)
Weight	75 kg (165.3 lb)
Dimensions	824.0 <sub>W</sub> x 674.5 <sub>D</sub> x 737.5 <sub>H</sub> mm (32.4 <sub>W</sub> x 26.5 <sub>D</sub> x 29.0 <sub>H</sub> " )
Maximum speed** (XY)	800 mm/s (31"/s)
Maximum speed** (Z)	250 mm/s (10"/s)
Maximum speed** (R*)	1080°/s
Drive system	Closed-loop stepper motor and driver package with absolute sensor
Drive system (R*)	5-phase micro-stepping motor
Memory capacity	PC storage
Data storage	PC storage / USB
General purpose I/O	8 inputs / 8 outputs (16 / 16 optional)
Dispensing controller	External
Input AC (to power supply)	100–240 VAC (±10%), 50/60 Hz, 20 A maximum, 380 W
Input air pressure vacuum (for rotating table)	0–1 mPa (0–145 psi)
Interpolation	4 axes (4D space)
Repeatability (XY / Z)***	±0.003 mm/axis
Repeatability (R*)**	±0.005°
Operating temperature	10–40° C (50–104° F)
Closed-loop X and Y axis encoder	Included
Tip detection	Included
Vision	CCD smart camera (included)
DispenseMotion software	Included
Laser height detection	Optional
Approvals	CE, UKCA, RoHS, WEEE, China RoHS

\*R = rotating table

\*\*Actual travel speed depends on the dispensing path and workpiece / tool payloads.

\*\*\*Repeatability results may vary depending on the method of measurement.

## Laser Height Sensing

- Pinpoint accuracy with optional laser height sensing
- Better dispensing

Both Laser B and Laser C detect variations on the surface of a product and allow the robot to automatically adjust the tip dispensing height, preventing uneven deposits and tip or workpiece damage. Use laser C for higher precision, detection of reflective or translucent surfaces, or detection of small areas or ledges less than 700 µm.

## Smart Vision

- Precise repeatability with powerful CCD camera
- Higher product quality and throughput

All PROPlus / PRO Series systems include a CCD camera that converts pixels to digital values to deliver precise, high-quality images. The software confirms workpiece presence and placement and automatically adjusts as in-process variations occur.

## Free Process Evaluation

Contact Nordson EFD to configure an automated dispensing system that meets your specific needs, with:

- A complimentary process evaluation by experienced fluid dispensing experts
- Samples processed for customer evaluation and approval prior to purchase



Integrated vision and laser make the 4-axis PROPlus Series a complete automated solution.



For Nordson EFD sales and service in over 40 countries, contact Nordson EFD or go to [www.nordsonefd.com](http://www.nordsonefd.com).

### Global

800-556-3484; +1-401-431-7000  
[info@nordsonefd.com](mailto:info@nordsonefd.com)

### Europe

00800 7001 7001  
[infoefd.europe@nordsonefd.com](mailto:infoefd.europe@nordsonefd.com)

### Asia

China: +86 (21) 3866 9006; [china@nordsonefd.com](mailto:china@nordsonefd.com)  
India: +91 80 4021 3600; [india@nordsonefd.com](mailto:india@nordsonefd.com)  
Japan: +81 03 5762 2760; [japan@nordsonefd.com](mailto:japan@nordsonefd.com)  
Korea: +82-31-736-8321; [korea@nordsonefd.com](mailto:korea@nordsonefd.com)  
SEAsia: +65 6796 9522; [sin-mal@nordsonefd.com](mailto:sin-mal@nordsonefd.com)

©2023 Nordson Corporation v121223